





Cross section A-A

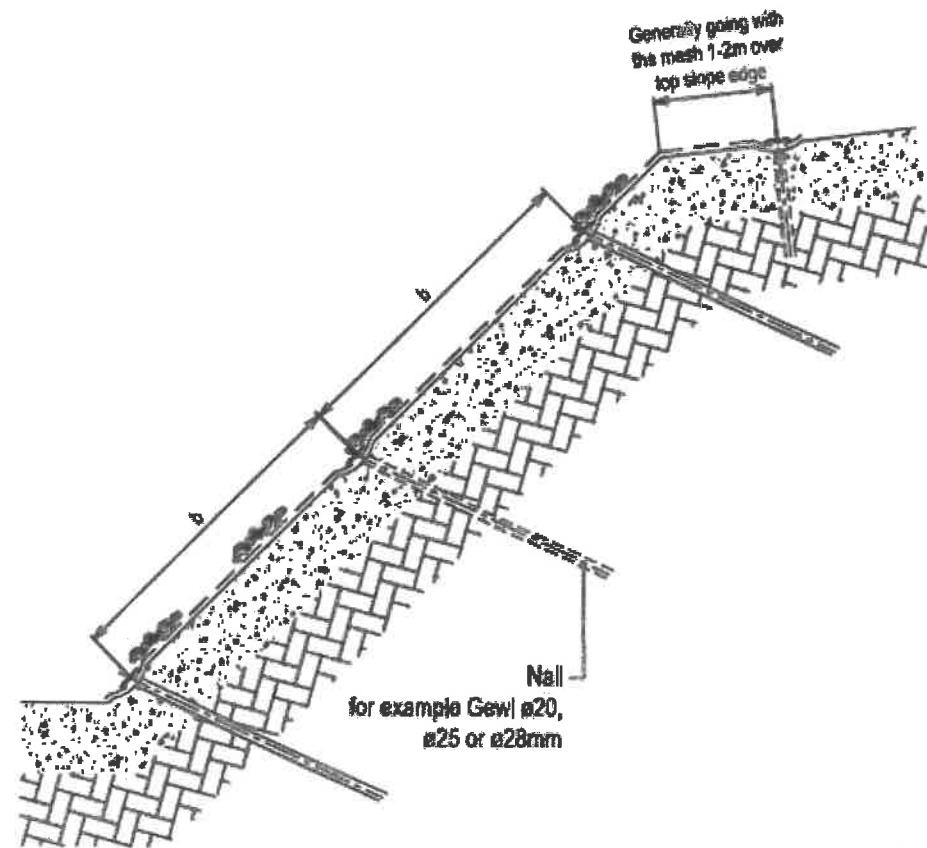



General nail arrangement

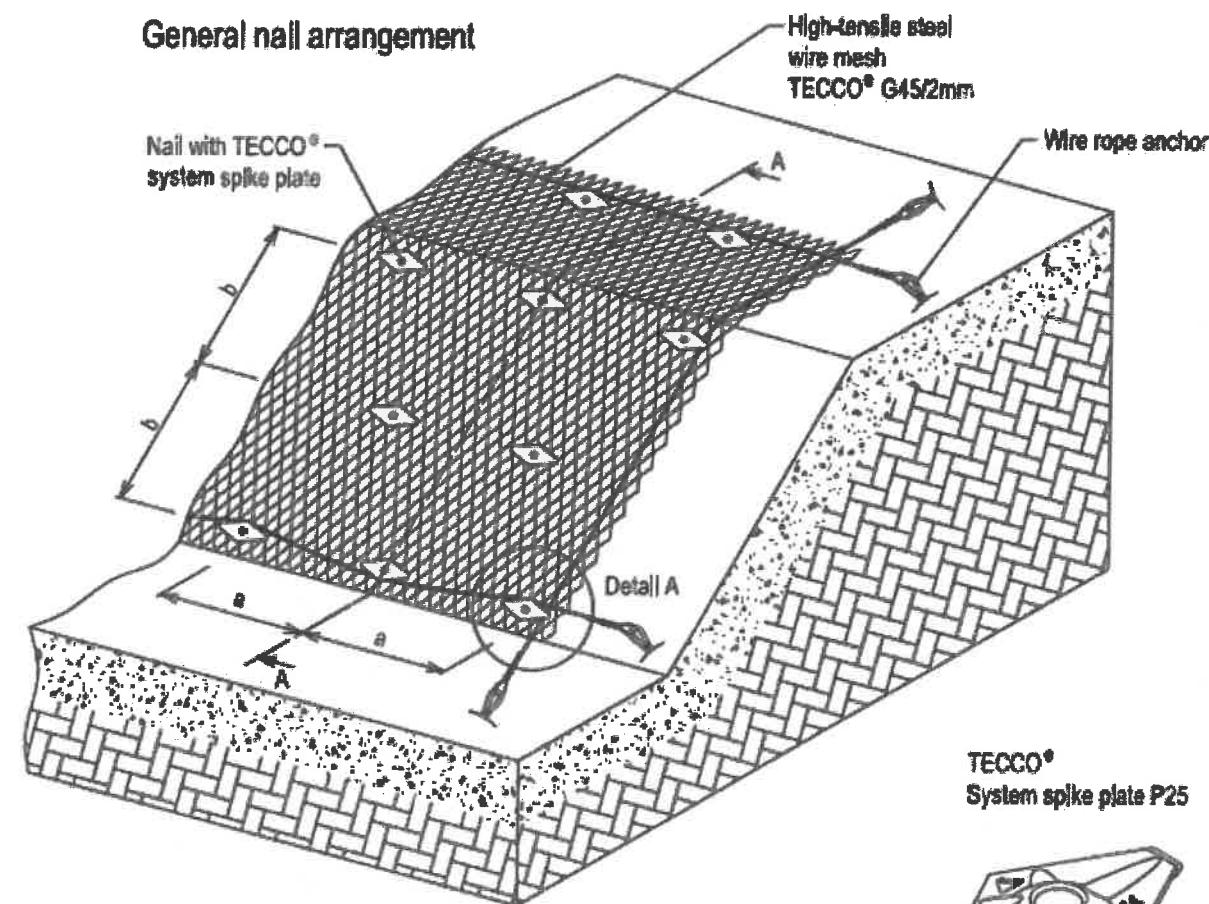

Detail A

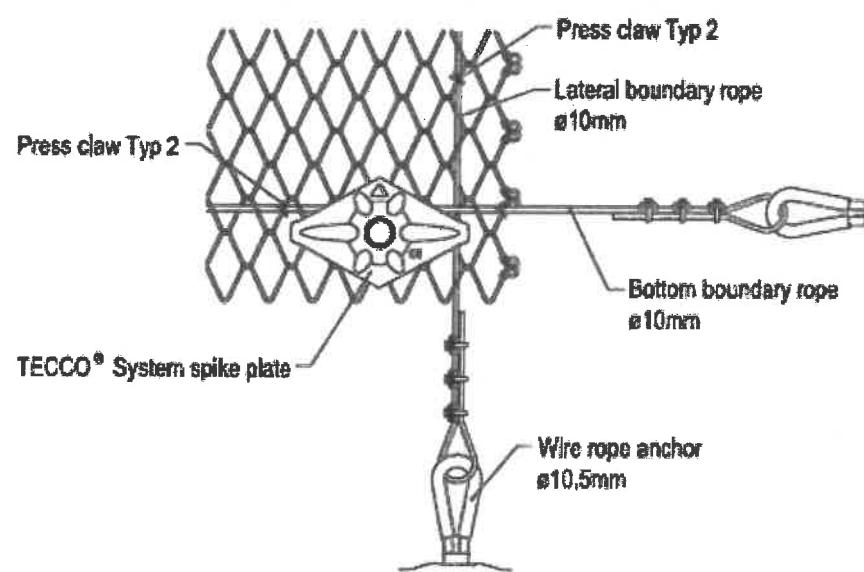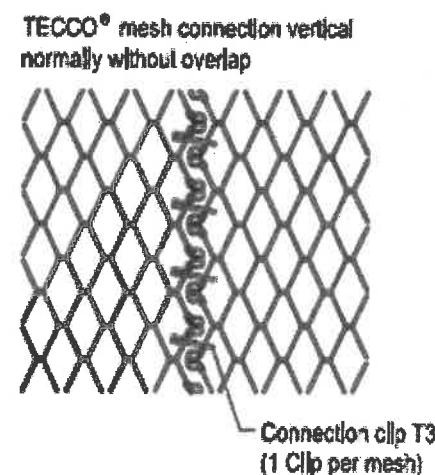

Connection clip T3



modification:	M: %	substitute for: GE-1017e ed. 29.07.16
-		replaced by:
TECCO® G45/2 System drawing		drawn 07.12.16 BH
		checked 07.12.16 BH
		approved 07.12.16 ROA1
GEOBRUGG AG CH-8590 Romanshorn		GE-1017e

This document is proprietary to Geobrugg AG and is copyrighted with all rights reserved. It may not in whole or in part, be distributed, copied in any form, translated or otherwise reproduced in any form.

This document will not be exchanged, when being modified.

Products



Self-drilling (IBO) anchors

(DYWI® Drill Hohlstab-System)

Type	Max.tensile load
R32-210	210kN
R32-250	250kN
R32-280	280kN
R32-320	320kN
R32-360	360kN
R32-400	400kN
R38-420	420kN
R38-500	500kN
R38-550	550kN
R51-550	550kN
R51-660	660kN
R51-800	800kN